

PhISCS-BnB: A Fast Branch and Bound Algorithm for the Perfect Tumor Phylogeny Reconstruction Problem

Erfan Sadeqi Azer^{1,†}, Farid Rashidi Mehrabadi^{1,3,†}, Salem Malikić¹, Xuan Cindy Li^{2,3}, Osnat Bartok⁵, Kevin Litchfield^{6,7}, Ronen Levy⁵, Yardena Samuels⁵, Alejandro A. Schäffer³, E. Michael Gertz³, Chi-Ping Day⁴, Eva Pérez-Guijarro⁴, Kerrie Marie⁴, Maxwell P. Lee⁴, Glenn Merlino⁴, Funda Ergun¹, and S. Cenk Sahinalp^{3,*}

¹Department of Computer Science, Indiana University, Bloomington, IN 47408, USA

²Program in Computational Biology, Bioinformatics, and Genomics, University of Maryland, College Park, MD 20742, USA

³Cancer Data Science Laboratory, Center for Cancer Research, National Cancer Institute, National Institutes of Health, Bethesda, MD 20892, USA

⁴Laboratory of Cancer Biology and Genetics, Center for Cancer Research, National Cancer Institute, National Institutes of Health, Bethesda, MD 20892, USA

⁵Department of Molecular Cell Biology, Weizmann Institute of Science, Rehovot, Israel

⁶Cancer Evolution and Genome Instability Laboratory, Francis Crick Institute, London NW1 1AT, UK

⁷Cancer Research UK Lung Cancer Centre of Excellence London, University College London Cancer Institute, London WC1E 6DD, UK

[†]Joint first authors

*Corresponding author

March 18, 2020

Abstract

Motivation: Recent advances in single cell sequencing (SCS) offer an unprecedented insight into tumor emergence and evolution. Principled approaches to tumor phylogeny reconstruction via SCS data are typically based on general computational methods for solving an integer linear program (ILP), or a constraint satisfaction program (CSP), which, although guaranteeing convergence to the most likely solution, are very slow. Others based on Monte Carlo Markov Chain (MCMC) or alternative heuristics not only offer no such guarantee, but also are not faster in practice. As a result, novel methods that can scale up to handle the size and noise characteristics of emerging SCS data are highly desirable to fully utilize this technology.

Results: We introduce PhISCS-BnB, a Branch and Bound algorithm to compute the most likely perfect phylogeny (PP) on an input genotype matrix extracted from a SCS data set. PhISCS-BnB not only offers an optimality guarantee, but is also 10 to 100 times faster than the best available methods on simulated tumor SCS data. We also applied PhISCS-BnB on a recently published large melanoma data set derived from the sub-lineages of a cell line involving 20 clones with 2367 mutations, which returned the optimal tumor phylogeny in less than 4 hours. The resulting phylogeny agrees with and extends the published results by providing a more detailed picture on the clonal evolution of the tumor.

Availability: <https://github.com/algo-cancer/PhISCS-BnB>

1 Introduction

Cancer is a highly dynamic, evolutionary disease. Constantly shaped by mutation and selection, cancer progression often results in the emergence of distinct tumor cell populations with varying sets of somatic mutations, commonly known as (sub)clones. The diverse pool of subclones may harbor treatment-resistant mutations. When favorably selected for in the tumor environment by treatment exposure, treatment-resistant

subclones may gain dominance over others and eventually contribute to treatment failure (Alizadeh et al., 2015). The challenges in developing effective cancer therapies under the heterogeneous tumor landscape thus motivate the following question: can we reconstruct the tumor phylogeny and unravel spatial and temporal intra-tumor heterogeneity (ITH) to enlighten cancer treatment strategies?

In recent years, several computational tools for analyzing intra-tumor heterogeneity and evolution from bulk sequencing data of tumor samples have been developed (Strino et al., 2013; Jiao et al., 2014; Hajira-souliha et al., 2014; Deshwar et al., 2015; Popic et al., 2015; El-Kebir et al., 2015; Malikić et al., 2015; Marass et al., 2016; El-Kebir et al., 2016; Donmez et al., 2017; Satas and Raphael, 2017). However, bulk sequencing data provides only an aggregate signal over large number of cells and, due to its limited resolution, all of these methods have several limitations in unambiguously inferring trees of tumor evolution. Most notably, they typically rely on clustering of mutations of similar cellular prevalence. Consequently, if two sets of mutations evolving on different branches of phylogenetic tree have similar cellular prevalence values, they get clustered together. Furthermore, even in cases where the cellular prevalence values of clusters are different, methods based on bulk sequencing data are frequently unable to distinguish between multiple trees that describe the observed data equally well (Malikić et al., 2019a; Kuipers et al., 2017).

The rise of single-cell sequencing (SCS) has enabled exploration of ITH at a higher, cellular resolution. Unfortunately even SCS can not trivially provide a comprehensive understanding of ITH. Among the lingering caveats with SCS, the most prominent is the prevailing presence of sequencing noise (Zafar et al., 2018). We are particularly interested in three types of noise in SCS datasets. (1) False positive mutation calls, potentially from sources like read errors, (2) false negative mutation calls, potentially from sources like variance in sequence coverage or allele dropout, (3) missing values for mutations from sites affected by DNA amplification failure.¹ The multi-faceted and high levels of sequencing noise have prompted the development of novel computational approaches that need to infer a tumor evolutionary model while compensating for all three sources of noise.

The first principled approaches for studying ITH by the use of SCS data were all based on probabilistic formulations that aim to infer the *most-likely perfect-phylogeny* (PP) of a tumor. SCITE (Jahn et al., 2016), OncoNEM (Ross and Markowitz, 2016) and SiFit (Zafar et al., 2017) are among these methods that primarily aim to build a PP (i.e. an evolutionary tree where no mutation can appear more than once and is never lost).² Following up on this, SPhyR (El-Kebir, 2018) formulates the tumor phylogeny reconstruction problem as an integer linear program (ILP) under the constraints imposed by the k -Dollo parsimony model where a gained mutation can only be lost k times. SCIΦ (Singer et al., 2018) simultaneously performs mutation calling and the tumor phylogeny inference taking read counts data as the input, rather than the more commonly used genotype matrix with inferred mutations, represented by columns, in distinct cells, represented in by rows.

As datasets with matching SCS and bulk sequencing data become publicly available, methods to infer tumor phylogeny through integrative use of these two data types are becoming available. B-SCITE (Malikić et al., 2019a) for example combines CITUP, which is designed for bulk sequencing data, with SCITE through an MCMC strategy. More recently PhISCS (Malikić et al., 2019b), offers the option of formulating integrative reconstruction of the most likely tumor phylogeny either as an ILP or as a CSP (boolean constraint satisfaction program), while allowing for a fixed number of PP violating mutations. The CSP version of PhISCS, when employing state of the art CSP (more specifically weighted max-SAT) solvers such as RC2 (Ignatiev et al., 2019) and Open-WBO (Martins et al., 2014) turn out to be the fastest among all available techniques even when only SCS data is available. Nevertheless, none of the available techniques can scale up to handle emerging data sets that involve thousands of cells (Laks et al., 2019); even moderate size SCS data involving a few hundred mutations and cells turn out to be problematic especially with the current “standard” false negative rate of 15 – 20%. Other recent techniques such as scVILP (Edrisi et al., 2019) and SiCloneFit (Zafar et al., 2019) focus on adding new features to (or relax constraints for) the tumor phylogeny

¹A final noise source is the *doublets*, the technical artifacts of two (or rarely more) cells with heterogeneous mutation profiles treated and sequenced as a single cell. Since there are a number of preprocessing techniques such as (Roth et al., 2016) to detect and eliminate doublets fairly well we will not focus on doublets as a source of noise in this paper.

²SiFit also allows for deletion events and loss of heterozygosity.

reconstruction problem and are (typically) not faster.³ Finally, even though new sequencing techniques such as single-cell cloning (SCC, i.e. bulk sequencing of homogeneous cell populations, each derived from a single cell) offer much lower false negative rates, the scale of the data they produce - involving thousands of mutations, require much faster solutions to the tumor phylogeny reconstruction problem.

In this paper, we present a Branch and Bound (BnB) algorithm and its implementation (called PhISCS-BnB, Phylogeny Inference using Single Cell Sequencing via Branch and Bound) to optimally reconstruct a tumor phylogeny very efficiently. Generally speaking, our BnB approach clusters entries of the input genotype matrix and processes them together, enabling faster execution. (See Section 3.1 and lemma 3.1). We introduce a number of *bounding* algorithms, some faster but offering limited pruning and others slower but with better pruning efficiency. Among them, a novel bounding algorithm with a 2-SAT formulation is a key technical contribution of our paper: through its use, PhISCS-BnB improves the running time of the fastest available methods for tumor phylogeny reconstruction by a factor of up to 100. (See Section 4).

2 Perfect Phylogeny Reconstruction Problem

Given a binary genotype matrix I , we would like to reconstruct the most likely phylogeny by discovering how to flip the smallest number of entries of I so it can provide a Perfect Phylogeny.

Preliminaries. Our input is a binary (genotype) matrix $I \in \{0, 1\}^{n,m}$. The n rows represent genotypes of single cells observed in a single-cell sequencing experiment and the m columns represent a set of considered mutations. $I(i, j) = 1$ indicates that mutation j is present in cell i ; $I(i, j) = 0$ indicates that it is not.

The *three-gametes rule* stipulates that a binary matrix $X \in \{0, 1\}^{n,m}$ should *not* have three rows and two columns (in any order) with the corresponding six entries displaying the configuration $(1, 0)$, $(0, 1)$ and $(1, 1)$. If the forbidden configuration is present, we say that there is a *violation*, referenced by the three rows and the two columns containing it. It was shown in (Gusfield, 1991) that satisfaction of the three-gametes rule by I is necessary and sufficient for the existence of a Perfect Phylogeny (PP) corresponding to I .

Given input matrix I , we call a binary matrix X a *descendant* of I if all entries of X are identical to those of I except some that have been *flipped* from 0 to 1. For a matrix X , $F_{0 \rightarrow 1}(I, X)$ is defined as the number of entries that are 0 in I and 1 in X . We sometimes refer to this value as the number of flips to get to X from I .

Our Problem. Given a genotype matrix I , we would like to obtain a minimum-cardinality set of *bit flips* (from 0 to 1, indicating a correction for a false negative - since false positive rates are several orders of magnitude lower)⁴ that removes all three-gametes rule violations in I and thus transforms I into a matrix Y that provides a PP.

3 Branch and Bound Method

In order to discover the smallest number of 0 to 1 flips that will remove all violations in input matrix I , we use a branch and bound (BnB) technique. In what follows, we give an overview of the building blocks of our branch and bound approach. Then we put all of them together in Algorithm PhISCS-BnB.

Our Branch and Bound algorithm forms a search tree where each node contains a matrix, with input matrix I at the root - for simplicity we might refer to a node with its label as well as its matrix. In this tree, a matrix X at node v is a *descendant* (as described in the preliminaries) of the matrix Y at v 's parent node; all matrices in the tree are thus descendants of I . The tree terminates in leaf nodes that are PP;

³One exception is ScisTree (Wu, 2019) which is reported to be faster but is a heuristic approach with no optimality guarantees.

⁴In general both false negative and false positives (respectively, 1 read as 0 and 0 read as 1) happen with distinct probabilities. The qualitative difference in these probabilities is due to the sequencing technology in use and thresholding rules employed in establishing I . As is well known, the false positive rate is three orders of magnitude or more lower than the false negative rate. In fact, in emerging data, e.g. from SCC experiments, the false positive rate approaches zero and thus can be ignored. As a result we focus only on false negatives and our proposed algorithm and its sub-routines make use of this assumption.

non-PP nodes will have two child nodes as the tree grows unless they have been pruned due to detected nonoptimality.

When a node v with matrix X is formed, v is assigned a *priority score* equal to the number of bit flips needed to get from I to X plus a lower bound on the number of flips necessary to remove all the violations in X . All nodes are kept in a priority queue and are explored in ascending order of their priority scores, unless they have been removed from consideration (pruned) by the bounding mechanism. When the whole tree has been explored or pruned, one of the PP nodes with the smallest number of flips away from I yields the answer.

For matrix X , we let $R_{a,b}^X(p, q)$ denote the set of rows with a in column p and b in column q , i.e., $R_{a,b}^X(p, q) = \{i \mid X_{i,p} = a \wedge X_{i,q} = b\}$. We drop the superscript, when the matrix X is clear from the context, and only write $R_{a,b}(p, q)$.

Algorithm 1 PhISCS-BnB

Input: $I \in \{0, 1\}^{n,m}$: Original input to the algorithm

Output: $Y \in \{0, 1\}^{n,m}$ such that $Y = \operatorname{argmin}_{\text{PP}(y)} F_{0 \rightarrow 1}(I, Y)$.

```

1: Best_Node  $\leftarrow$  A simple PP solution (See Section 3.3)
2:  $Q \leftarrow$  An empty priority queue
3: Push  $I$  in  $Q$ 
4: while  $Q$  is not empty do
5:    $C \leftarrow$  pop next node from  $Q$  with the lowest priority score
6:   New_node1  $\leftarrow C$ 
7:   for  $r \in R_{0,1}(p, q)$  do ▷ See Lemma 3.1
8:     New_node1( $r, p$ )  $\leftarrow 1$  ▷  $F_{0 \rightarrow 1}(I, \text{New\_node}_1)$  is also updated here
9:   New_node2  $\leftarrow C$ 
10:  for  $r \in R_{1,0}(p, q)$  do
11:    New_node2( $r, q$ )  $\leftarrow 1$ 
12:  for  $i \in \{1, 2\}$  do
13:    if New_node $i$  is a PP then ▷ i.e., New_node $i$  is a leaf
14:      if  $F_{0 \rightarrow 1}(I, \text{New\_node}_i) < F_{0 \rightarrow 1}(I, \text{Best\_Node})$  then
15:        Best_Node  $\leftarrow$  New_node $i$ 
16:    else ▷ Use any bounding algorithm proposed in Section 3.2
17:      lb  $\leftarrow$  A lower bound for the number of flips to get to a PP matrix from New_node $i$ 
18:      if lb +  $F_{0 \rightarrow 1}(I, \text{New\_node}_i) < F_{0 \rightarrow 1}(I, \text{Best\_Node})$  then
19:        Push New_node $i$  in  $Q$  with priority score set to lb +  $F_{0 \rightarrow 1}(I, \text{New\_node}_i)$ 
20: Return Best_Node

```

3.1 Branching

Let X be the matrix at the node being explored. If X has no violation, it is considered a leaf. Otherwise, let (p, q) be the pair of columns for one particular violation that was found,⁵ i.e., $|R_{a,b}(p, q)| > 0$ for all $(a, b) \in \{(0, 1), (1, 0), (1, 1)\}$. We have two options for fixing the violation. As a violation involving columns p, q contains both a $(1, 0)$ and a $(0, 1)$ in different rows, we have the option of converting either one to a $(1, 1)$ to remove the violation. To reflect this, we construct two child nodes from the current node, one for each option. As an added optimization, once we decide to fix a $(0, 1)$ (resp. $(1, 0)$) on columns p, q , we fix all $(0, 1)$ (resp. $(1, 0)$) on these two columns, by changing them to $(1, 1)$. In particular, in the left child, all entries whose row is in $R_{0,1}(p, q)$ and whose column is p are flipped from 0 to 1. Similarly, in the right child entries whose row is in $R_{1,0}(p, q)$ and whose column is q are flipped.

In some cases, the above branching rule, which can flip multiple 0s at a time, shrinks the height of the search tree compared to the algorithm in (Chen et al., 2006; Cai, 1996), which flips a single 0 in a child

⁵If there are multiple pairs of columns involved in violations we impose an ordering on them and pick a pair according to this order; thus, we are always considering a single column pair.

node. The following lemma formally expresses why we flip several entries in a column together at Lines 8 and 11 of the pseudocode: if a $(0, 1)$ in a violation involving columns p, q of matrix X is a $(1, 1)$ in a PP descendant X' of X , all other $(0, 1)$ on (p, q) are $(1, 1)$ as well. An analogous statement holds for $(1, 0)$.

Lemma 3.1. *For any $X \in \{0, 1\}^{n,m}$ with a violation involving columns p, q , let X' be any PP descendant of X . Then, at least one of the following hold:*

- $\forall r_1 \in R_{0,1}(p, q), X'(r_1, p) = 1$, or
- $\forall r_2 \in R_{1,0}(p, q), X'(r_2, q) = 1$.

Proof. Assume that the lemma is false; i.e., there is an X' such that $\exists r_1 \in R_{0,1}(p, q), X'(r_1, p) = 0 \wedge \exists r_2 \in R_{1,0}(p, q), X'(r_2, q) = 0$.

Since (p, q) corresponds to a violation and all the 1 entries in X have to remain 1 in X' , there should be a row r_3 such that $X'(r_3, p) = X'(r_3, q) = 1$. This implies that the pair of columns (p, q) and the triplet of rows (r_1, r_2, r_3) corresponds to a violation. This contradicts the assumption that X' is PP. \square

3.2 Bounding Mechanisms

A *bounding* algorithm is a method that computes a lower bound for the number of flips needed to transform matrix X at a node v to a PP matrix. It thus helps the branch and bound algorithm to prune the nodes that are provably worse than the currently maintained best node, i.e., the variable `Best_Node` in Algorithm `PhISCS-BnB`.

We reuse the calculated lower bound as the estimate of how many flips a matrix X will require to transform into a PP matrix, and then add the number of flips needed to transfer I to X , in order to set the priority score of the node containing X . Recall that all the introduced nodes are pushed to a priority queue, and in each iteration the node with the lowest priority score is chosen to be explored. So the node X we pick will represent the lowest number of total flips from I to a PP node going through X .

One observation that leads to a lower bound is as follows. Consider a pair of columns that have at least one row with pattern $(1, 1)$, then the number of flips, involving columns p and q , is at least $\min(|R_{0,1}(p, q)|, |R_{1,0}(p, q)|)$. Therefore, for an arbitrary partitioning of the set of columns to pairs, we can aggregate these bounds to achieve a lower bound for the whole matrix.

In the above, one would expect the choice of the partition to have an impact on the quality of the lower bound estimate. To explore this, in what follows, we present three bounding algorithms that progressively add more sophistication to the above idea. These three bounding algorithms offer a tradeoff between the per-node running time and the accuracy of the bound. For some inputs the fast (and possibly not-so accurate) bounding results in a faster execution, but for other inputs a different tradeoff is better. It is worth mentioning that for biologically plausible inputs, our experiments show that the higher accuracy of bounding is much more important to total time than the per-node running time. We present first two bounding algorithms in Section 3.2.1. The third and the most sophisticated one is presented in Section 3.2.2 and is used in our experiments to compare with previous tools in the literature.

3.2.1 Random Partition vs Maximum Weighted Matching

As our first bounding method, we partition the columns of the matrix into pairs uniformly at random. The technique is simple, but more sophisticated techniques might give tighter bounds.

As our second method, we describe a method based on Maximum Weighted Matching (MWM). Construct a weighted undirected graph $G = (V, E, w)$ where the vertices are the columns of I , each column representing a mutation: $V = \{c_1, \dots, c_m\}$ (c_i corresponds to i^{th} mutation) and the edges are column pairs that display a $(1, 1)$: $E = \{\{c_i, c_j\} \mid |R_{1,1}(c_i, c_j)| > 0\}$. In the following we calculate a weight corresponding to an edge $e = \{c_i, c_j\} \in E$, to be a lower bound on the number of entries in columns c_i and c_j that have to be flipped to make I a PP matrix. Formally, for each edge $e = \{c_i, c_j\} \in E$, $w(e) = \min(|R_{0,1}(c_i, c_j)|, |R_{1,0}(c_i, c_j)|)$. The process of constructing G takes $\Theta(nm^2)$ time. In this graph theoretic formulation, each partitioning

corresponds to a matching G . Thus, we take advantage of the algorithm described in (Galil, 1986) to find maximum weighted matching with $O(m^3)$ running time.

In both bounding algorithms, one can maintain the bounds dynamically by processing only small changes from one node to another node near it, (in some cases, to its sibling). The details of such dynamic maintenance are out of the scope of this work.

3.2.2 2-SAT

For this approach we present a novel constraint satisfaction formulation that describes a set, containing but not necessarily equal to, all the valid flips-set corresponding to I . Let $z_{i,j}$ denote a binary variable corresponding to the $(i, j)^{th}$ entry. We define variables for only zero entries. Consider a pair of columns (p, q) with $|R_{1,1}(p, q)| > 0$. For any row $r_1 \in R_{0,1}(p, q)$ and any row $r_2 \in R_{1,0}(p, q)$ add $z_{r_1,p} \vee z_{r_2,q}$. The intuition is that for any violation sextuplet, either one of zeros should be flipped. Satisfying these constraints is necessary to achieve a PP matrix, but not sufficient.

Let MWS (short for Minimum Weighted SAT) denote an arbitrary off-the-shelf tool that, given a satisfiable Boolean formula, outputs a satisfying assignment with the minimum number of variables assigned to true. Then the number of variables with true value in an optimal assignment, satisfying all these constraints, is a lower bound for the optimal number of flips resulting in a PP matrix. Formally, the lower bound is equal to

$$\text{MWS} \left(\bigwedge_{\substack{p,q \in [m]: p < q \\ r_1, r_2: r_1 \in R_{0,1}(p,q) \wedge r_2 \in R_{1,0}(p,q)}} z_{r_1,p} \vee z_{r_2,q} \right) \quad (1)$$

After achieving a minimum weight satisfying assignment, we flip those zero entries that correspond to z variables with value 1.

Compact Formulation. The formulation in Equation 1 can be expressed in fewer constraints by introducing a new set of variables and following the case distinction in Lemma 3.1: for each pair of columns p, q define a corresponding binary variable $B_{p,q}$. The weight of this new set of variables is set to zero in MWS formulation. If this variable is set to zero (by a minimum weighted SAT routine) then all variables $z_{r_1,p}$, $r_1 \in R_{0,1}(p, q)$, take value 1. Similarly, if the variable is set to one, then all $z_{r_2,q}$, $r_2 \in R_{1,0}(p, q)$ take value 1. Formally, the formulation changes to $\text{MWS}(H_1 \wedge H_2)$, where,

$$\begin{aligned} H_1 &= \bigwedge_{\substack{p,q \in [m]: p < q \\ r_1: r_1 \in R_{0,1}(p,q)}} (B_{p,q} \vee z_{r_1,p}) \\ H_2 &= \bigwedge_{\substack{p,q \in [m]: p < q \\ r_2: r_2 \in R_{1,0}(p,q)}} (\overline{B_{p,q}} \vee z_{r_2,q}). \end{aligned} \quad (2)$$

The number of constraints corresponding to the column pair (p, q) will decrease from $|R_{0,1}(p, q)| \cdot |R_{1,0}(p, q)|$ in Equation 1 to $|R_{0,1}(p, q)| + |R_{1,0}(p, q)|$ in Equation 2. There are two advantages to the compact formulation: (I) the time spent on forming the set of constraints is shorter, (II) for some set of inputs, heuristic sat-solvers run more efficiently on the formulation given in Equation 2 than on Equation 1, even though they are logically equivalent. In each experiment, we use only one of these formulations and it is specified in the corresponding description of the experiment.

Extra constraints. As another version of our lower bound, we add a set of new constraints. These constraints improve the lower bound to be a closer estimate of the optimal number of flips for some inputs. The tighter bound helps the branch and bound framework explore fewer nodes, even though the time to compute the bound per node increases. This advantage comes with a dip in the running time of the bounding calculation within each node.

The idea for the new set of constraints is to preclude some solutions that satisfy all constraints in Equation 1 but still do not remove all violations. In particular, when, for a specific pair of columns (p, q) , $R_{1,1}(p, q)$

is empty, there is no constraint involving pair (p, q) in Equation 1. As an example, assume Columns 1, 2 contain both $(1, 0)$ and $(0, 1)$ rows, but no $(1, 1)$. Columns 2, 3 contain a violation, which MWS removes by flipping 0s in column 2. This might create a $(1, 1)$ in Columns 1, 2, and create a violation that was not there in the beginning. Since, Equation 1 does not contain any constraints for Columns 1, 2, this new violation is not removed.

In order to avoid such an outcome, we add new constraints to our formulation. Now, if some flip introduces a new violation, the extra constraints will enforce at least one additional flip to remove the newly created violation(s). Formally, the proposed set of constraints to add to Equation 1 is $E_1 \wedge E_2$, where,

$$E_1 = \left(\bigwedge_{\substack{p, q \in [m]: p < q \\ r_1, r_2, r_3: \\ r_1, r_3 \in R_{0,1}(p, q) \wedge r_1 \neq r_3 \\ \wedge r_2 \in R_{1,0}(p, q)}} z_{r_1, p} \vee z_{r_2, q} \vee \overline{z_{r_3, p}} \right) \quad (3)$$

$$E_2 = \left(\bigwedge_{\substack{p, q \in [m]: p < q \\ r_1, r_2, r_3: r_1 \in R_{0,1}(p, q) \\ \wedge r_2, r_3 \in R_{1,0}(p, q) \wedge r_2 \neq r_3}} z_{r_1, p} \vee z_{r_2, q} \vee \overline{z_{r_3, q}} \right).$$

The number of constraints corresponding to columns (p, q) is $|R_{0,1}(p, q)| \cdot |R_{1,0}(p, q)| \cdot (|R_{0,1}(p, q)| + |R_{1,0}(p, q)|)$. This is higher than the number of constraints in both Equations 1 and 2. However, for some matrices (e.g., the one processed in Section 4.1) the resulting tighter bound improves the running time of overall branch and bound algorithm tremendously.

3.3 Initial Solution

For the above bounding mechanism to start pruning, a feasible solution is required to initialize the variable `Best_Node` at pseudocode Line 1. When using Random Partition or Maximum Weighted Matching as a bounding algorithm, find an initial value as follows. We first find a pair of columns corresponding to a violation and flip one of the zero entries involved in the violation. We repeat this until no violation is left. On the other hand, when 2-SAT bounding is used, we solve the corresponding formulation from Equations 1, 2, or 3. We then apply the chosen entries to flip and repeat this process until we obtain a PP matrix. In each iteration, at least one flip will be performed and there are finitely many zero entries to flip. Therefore, this process always terminates and results in a PP matrix.

3.4 Analysis

Correctness. In the search tree explored by the branch and bound algorithm, we are guaranteed to find the optimum path from I to a PP matrix. This is because throughout the execution (a lower bound on) the projected number of flips that a node needs to reach PP is compared against the currently best known way of reaching PP. If the node has no chance of beating the current best, it and all of its descendants are pruned. Consequently, PhISCS-BnB does not prune any nodes on the path to an optimum solution before reaching an optimum solution for the first time. Therefore, as long as our lower bounding techniques work correctly, our algorithm will discover an optimum PP.

In both the Random Partition and Maximum Weighted Matching techniques for obtaining a lower bound, we consider a partitioning of columns to pairs and calculate the minimum number of flips within each pair. Since the absence of violations within these pairs is necessary (but possibly not sufficient) for the removal of all violations, this estimate is a lower bound for the whole matrix.

In the 2-SAT approach, we form a set of constraints that must be satisfied in order to reach any PP descendant of a given node. That means the set of potential solutions obtained by satisfying all the constraints in the 2-SAT formulation is a superset of all PP matrices. That is why the optimum solution satisfying these conditions requires the same number of or fewer flips than any PP matrix.

Running Time. The worst-case running time of Algorithm PhISCS-BnB is $O(2^{c_{opt}} \cdot T)$ where c_{opt} is the minimum number of flips needed to turn I to a PP matrix, and T is the running time of the bounding algorithm. A naive bounding algorithm, as in (Chen et al., 2006; Cai, 1996), incurs a running time of $T = O(mn)$. This is asymptotically the same as the running time for our random partition technique. Similarly, maximum weighted matching runs in time $T = O(nm^2 + m^3)$: the first term is for forming the weighted graph, and the second term is for solving maximum weighted matching. Solving the 2-SAT formulation takes super-polynomial time in the worst case as the weighted 2-SAT problem is NP-hard. While one might expect infeasibly long running times due to the hardness of 2-SAT, our experiments generally seemed to avoid worst-case behavior as the running times stayed mostly reasonable even for large matrices.

4 Experimental Results

In this section we discuss our experimental results on real data and simulations.

4.1 Single-cell Cloning Data from Mouse Melanoma Model

We first demonstrate the utility of PhISCS-BnB in studying evolutionary history on a real dataset harboring a large number of somatic mutations. This dataset was recently published in (Wolf et al., 2019), where the effect of the extent of intra-tumor heterogeneity on the immune response in melanoma was studied. In total, 20 single-cell clones (SCCs), denoted as C3, C4, ..., C22, were derived from parental mouse melanoma B2905 cell line and bulk whole exome sequenced at the mean depth of $100\times$. (See (Wolf et al., 2019) for additional details.)

After read alignment, calling and filtering the variants in all 20 SCCs, 2367 distinct SNVs were identified to be in at least one SCC. Importantly, the distribution of mutational variant allele frequencies revealed that many SCCs in the original dataset were comprised of a mixture of one major and one or more minor subclonal populations. In order to obtain genotypes reflecting true single-cell data to be used as an input to PhISCS-BnB, we considered only those variants whose SCC specific overall read coverage is at least $20\times$ and whose variant allele frequency is at least 40% as *present* in that SCC. All other entries in the genotype of the SCC were set to 0. Even though a stringent threshold on minimum variant allele frequency used in this genotype calling strategy can result in a number of false negative mutation calls, PhISCS-BnB was observed to successfully correct for this type of noise.⁶

The tree inferred in the original study (shown in the right part of the Figure 1) was derived by the use of non-private mutations only (i.e., mutations present in at least two SCCs) through clustering by the SciClone tool (Miller et al., 2014), followed by manual post-processing and filtering of some of the reported clusters and finally phylogenetic tree was inferred by the use of ClonEvol (Dang et al., 2017) a tool that treats each SCC as a mixture of cell populations and aims to heuristically build a single joint tumor phylogeny.

In order to facilitate a fair and natural comparison of the results by PhISCS-BnB to those in the original study, we first excluded all private mutations. The phylogeny reported by PhISCS-BnB on the remaining set of 1225 non-private SNVs is shown in the left part of Figure 1. As can be seen PhISCS-BnB inferred phylogeny generally agrees with that of the original study but is much more detailed with specific positions for mutations and cells in the tree topology. Furthermore, PhISCS-BnB suggests subtle but important differences, e.g. with respect to the placement of (i) clones C8 and C11 with respect to C4 and C16, (ii) clone C13 with respect to C21 and C22 as well as C12 and C18, and (iii) clones C9 and C17 on the trunk of tree. A more detailed depiction of the tumor phylogeny with mutation assignments for the chromosomes of each clone (marked blue) as well as PhISCS-BnB corrected false negative mutations (marked red) can be found in Supplementary File Figure 5. As can be seen, the mutations in C9 form a subset of those in C17, which in turn is a subset of the mutations of their inferred descendants C7 and C15. Neither C9 nor C17 required many false negative corrections to be placed in the trunk. Similar observations can be made for other modifications suggested by PhISCS-BnB increasing our confidence with respect to the resulting tree topology.

⁶The empirical false negative rate reported by PhISCS-BnB was $\sim 8\%$ due to stringent thresholding we applied on read coverage and variant allele frequency.

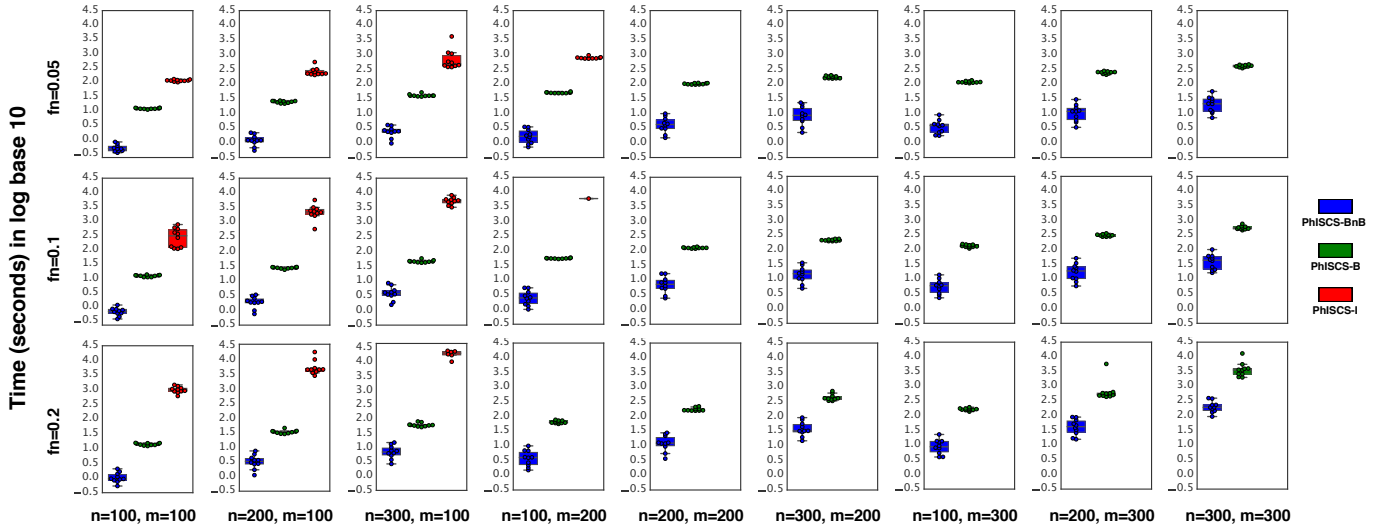


Figure 2: Comparison of PhISCS-BnB with PhISCS-B and PhISCS-I in terms of running time (seconds) in log base 10. In each case, 10 distinct trees of tumor evolution were generated, each with 10 subclones. A time-limit of 8 hours was used for running each tool (those cases that exceed the time-limit are not represented here). In the plot, n , m and fn , respectively, denote the number of cells, the number of mutations and the false negative error rate.

that PhISCS-BnB is faster than the best available alternative (i.e. PhISCS-B) by a factor of 10 to 100.⁷

4.3 Comparison of PhISCS-BnB against SCITE on simulated data

In a final experiment, we compared PhISCS-BnB against one of the best-known tools for tumor phylogeny reconstruction, SCITE (Jahn et al., 2016), this time with respect to accuracy. As mentioned earlier, SCITE is based on MCMC and as such requires the user to specify the number of iterations, thus indirectly its running time.⁸ As input data, we simulated tumor phylogenies, each with 100 to 300 cells and 100 to 300 mutations, with false negative error rates ranging from 5% to 20%. In each case, 10 distinct trees of tumor evolution were generated, each with 10 subclones. We allowed SCITE to run with 3 restarts, each with a running time (the number of iterations allowed was calculated by dividing this time with the average time per iteration we calculate) 10 times that of PhISCS-BnB on the same input (again, details of the computational platform we used can be found in Supplementary File Section B.1) giving a significant advantage to SCITE over PhISCS-BnB.

For computing the *accuracy* of the inferred tumor phylogenies in comparison to the ground truth, we first used the multi-labeled tree similarity measure (MLTSM) (Karpov et al., 2019) introduced recently. Since MLTSM is a normalized similarity measure, the closer its value to 1.0 implies a higher level of similarity between the inferred tree and the ground truth. The MLTSM between the ground truth trees and the inferred trees is presented in Figure 3. As can be expected, since PhISCS-BnB constructs the optimal tree, the similarity of its output to the ground truth is ~ 1.0 for all data sets. On the other hand, even though SCITE was given significantly more running time than required by PhISCS-BnB, its output has a relatively low similarity to the ground truth (in the range of $[0.2, 0.6]$).

We have additionally compared the trees obtained by both SCITE and PhISCS-BnB with respect to other measures as can be seen in Supplementary File Section D.1. With respect to almost every measure, SCITE offers inferior performance in the given time-limit. As a final experiment, we have let SCITE to run on the same datasets for approximately 24 hours. As can be seen in Supplementary File Section D.4, SCITE

⁷Note that we used the compact formulation that is mentioned in Section 3.2.2 to run PhISCS-BnB on the simulated data but not on real data.

⁸The approximation of the time that SCITE takes per iteration for a given input matrix was calculated by running it 10 times, each with 20000 iterations with 1 restart and then taking the average running time per iteration in this set of runs.

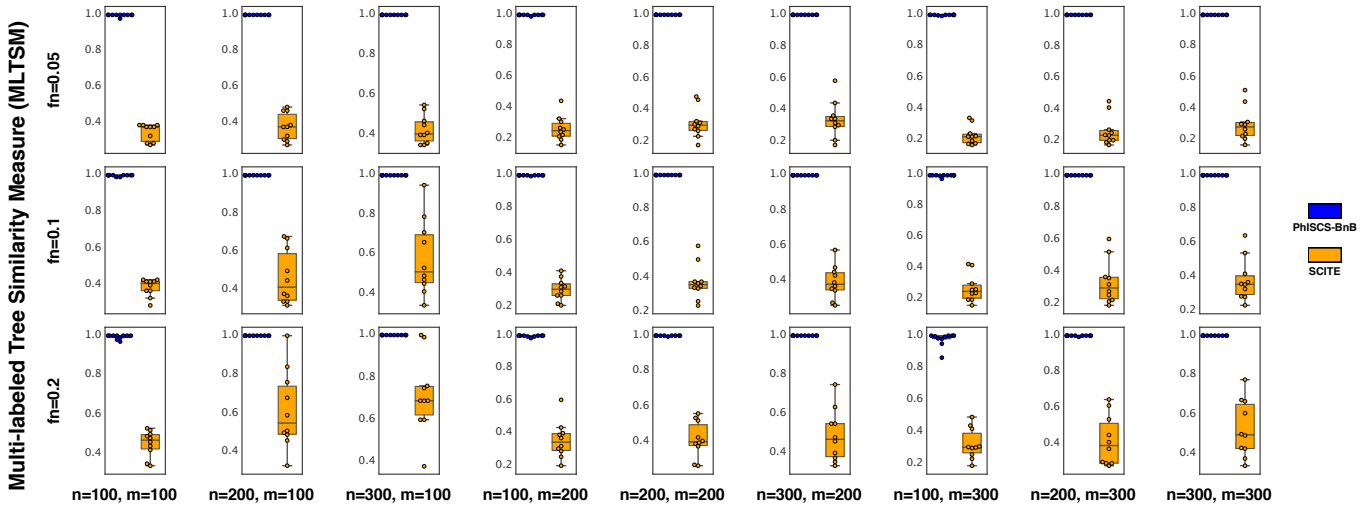


Figure 3: Comparison of PhISCS-BnB with SCITE with respect to the multi-labeled tree similarity measure (MLTSM). For each panel, 10 distinct trees of tumor evolution were generated, each with 10 subclones. In the plot, n , m and fn , respectively, denote the number of cells, the number of mutations and the false negative error rate.

can then produce trees almost as similar to the ground truth as those obtained by PhISCS-BnB.

5 Conclusions

We presented new algorithms and based on them a software package, PhISCS-BnB, to solve the perfect phylogeny problem on noisy single cell (mutation) sequencing data from tumors. On both simulated data and real data from mouse melanoma cell lines, we showed that PhISCS-BnB is one to two orders of magnitude faster than the best available methods, and can solve large instances of practical importance to optimality.

PhISCS-BnB is a branch and bound method, employing a variety of bounding techniques that use either state-of-the-art solvers for classical NP-hard problems such as max-SAT or polynomial time algorithms for 2-SAT and MWM, to prune efficiently and effectively the search tree of solutions. In theoretical computer science, different NP-complete problems are presented as equivalent and reducible to one another (in polynomial time) (Cormen et al., 2009). However, the disproportionate practical importance of a few NP-complete problems, such as max-SAT and the Traveling Salesperson Problem (TSP) (Applegate et al., 2006), has led to high-quality software that can solve instances of these NP-complete problems efficiently and to optimality. Therefore efficient reduction of an NP-complete problem (such as PP) to max-SAT or TSP can leverage existing software to solve the problem much more efficiently. Even if the reduction does not preserve solutions (as per our reductions to 2-SAT or MWM problems), but only gives a bound on solution costs, the reduction can be used within a branch-and-bound framework, as we have done in PhISCS-BnB. This paradigm is widely applicable in bioinformatics in which domain-specific NP-complete problems abound (Gusfield, 2019).

Better understanding of SCS data may lead to better treatments or better strategies for drug development. In current treatment strategies, mutation sequencing data are presented to tumor boards to decide the course of treatment (Mueller et al., 2019). In that clinical context, the rapid availability of phylogenetic trees to identify the tumor subclones could inform treatment. Hence, improving the efficiency of phylogenetic analysis of tumor data, as we have done in PhISCS-BnB, could have a direct impact on clinical treatment decisions.

Acknowledgements

This work is supported in part by the Intramural Research Program of the National Institutes of Health, National Cancer Institute. This work utilized the computational resources of the NIH HPC Biowulf cluster (<http://hpc.nih.gov>) and in particular Gurobi (<http://www.gurobi.com>) to solve some optimization problems. This work was also supported in part by Lilly Endowment, Inc., through its support for the Indiana University Pervasive Technology Institute (Stewart et al., 2017). E.S.A., F.E. and S.C.S. were supported in part by NSF grant AF-1619081 and F.R.M. was supported in part by Indiana U. Grand Challenges Precision Health Initiative.

References

- Ash A Alizadeh, Victoria Aranda, Alberto Bardelli, Cedric Blanpain, Christoph Bock, Christine Borowski, Carlos Caldas, Andrea Califano, Michael Doherty, Markus Elsner, et al. Toward understanding and exploiting tumor heterogeneity. *Nature Medicine*, 21(8):846–853, 2015.
- David L Applegate, Robert E Bixby, Vasek Chvatal, and William J Cook. *The Traveling Salesman Problem: A Computational Study*. Princeton University Press, 2006.
- Leizhen Cai. Fixed-parameter tractability of graph modification problems for hereditary properties. *Information Processing Letters*, 58(4):171–176, 1996.
- Duhong Chen, Oliver Eulenstein, David Fernandez-Baca, and Michael Sanderson. Minimum-flip supertrees: complexity and algorithms. *IEEE/ACM Transactions on Computational Biology and Bioinformatics (TCBB)*, 3(2):165–173, 2006.
- Thomas H Cormen, Charles E Leiserson, Ronald L Rivest, and Clifford Stein. *Introduction to Algorithms*. MIT Press, 2009.
- Casper da Costa-Luis. tqdm: A fast, extensible progress meter for python and cli. *Journal of Open Source Software*, 4(37):1277, 2019.
- Lisandro D Dalcin, Rodrigo R Paz, Pablo A Kler, and Alejandro Cosimo. Parallel distributed computing using python. *Advances in Water Resources*, 34(9):1124–1139, 2011.
- HX Dang, BS White, SM Foltz, CA Miller, Jingqin Luo, RC Fields, and CA Maher. Clonevol: clonal ordering and visualization in cancer sequencing. *Annals of oncology*, 28(12):3076–3082, 2017.
- Amit G Deshwar, Shankar Vembu, Christina K Yung, Gun Ho Jang, Lincoln Stein, and Quaid Morris. PhyloWGS: reconstructing subclonal composition and evolution from whole-genome sequencing of tumors. *Genome Biology*, 16(1):35, 2015.
- Nilgun Donmez, Salem Malikic, Alexander W. Wyatt, Martin E. Gleave, Colin Collins, and S Cenk Sahinalp. Clonality inference from single tumor samples using low-coverage sequence data. *Journal of Computational Biology*, 24(6):515–523, 2017. doi: 10.1089/cmb.2016.0148.
- Mohammadamin Edrisi, Hamim Zafar, and Luay Nakhleh. A Combinatorial Approach for Single-cell Variant Detection via Phylogenetic Inference. In Katharina T. Huber and Dan Gusfield, editors, *19th International Workshop on Algorithms in Bioinformatics (WABI 2019)*, volume 143 of *Leibniz International Proceedings in Informatics (LIPIcs)*, pages 22:1–22:13, Dagstuhl, Germany, 2019. Schloss Dagstuhl–Leibniz-Zentrum fuer Informatik. ISBN 978-3-95977-123-8. doi: 10.4230/LIPIcs.WABI.2019.22.
- Mohammed El-Kebir. Sphyr: tumor phylogeny estimation from single-cell sequencing data under loss and error. *Bioinformatics*, 34(17):i671–i679, 2018.

- Mohammed El-Kebir, Layla Oesper, Hannah Acheson-Field, and Benjamin J Raphael. Reconstruction of clonal trees and tumor composition from multi-sample sequencing data. *Bioinformatics*, 31(12):i62–i70, 2015.
- Mohammed El-Kebir, Gryte Satas, Layla Oesper, and Benjamin J Raphael. Inferring the mutational history of a tumor using multi-state perfect phylogeny mixtures. *Cell systems*, 3(1):43–53, 2016.
- Zvi Galil. Efficient algorithms for finding maximum matching in graphs. *ACM Computing Surveys (CSUR)*, 18(1):23–38, 1986.
- Dan Gusfield. Efficient algorithms for inferring evolutionary trees. *Networks*, 21(1):19–28, 1991.
- Dan Gusfield. *Integer Linear Programming in Computational and Systems Biology: An Entry-level Text and Course*. Cambridge University Press, 2019.
- Gabriel Hackebeil. pybnb. <https://github.com/ghackebeil/pybnb>, 2018.
- Aric Hagberg, Pieter Swart, and Daniel S Chult. Exploring network structure, dynamics, and function using networkx. Technical report, Los Alamos National Lab.(LANL), Los Alamos, NM (United States), 2008.
- Iman Hajirasouliha, Ahmad Mahmoody, and Benjamin J Raphael. A combinatorial approach for analyzing intra-tumor heterogeneity from high-throughput sequencing data. *Bioinformatics*, 30(12):i78–i86, 2014.
- J. D. Hunter. Matplotlib: A 2d graphics environment. *Computing in Science & Engineering*, 9(3):90–95, 2007. doi: 10.1109/MCSE.2007.55.
- Alexey Ignatiev, Antonio Morgado, and Joao Marques-Silva. Rc2: An efficient MaxSAT solver. *Journal on Satisfiability, Boolean Modeling and Computation*, 11(1):53–64, 2019.
- Katharina Jahn, Jack Kuipers, and Niko Beerenwinkel. Tree inference for single-cell data. *Genome Biology*, 17(1):86, May 2016. ISSN 1474-760X. doi: 10.1186/s13059-016-0936-x.
- Wei Jiao, Shankar Vembu, Amit G. Deshwar, Lincoln Stein, and Quaid Morris. Inferring clonal evolution of tumors from single nucleotide somatic mutations. *BMC Bioinformatics*, 15:35, 2014. doi: 10.1186/1471-2105-15-35.
- Nikolai Karpov, Salem Malikic, Md Khaledur Rahman, and S Cenk Sahinalp. A multi-labeled tree dissimilarity measure for comparing clonal trees of tumor progression. *Algorithms for Molecular Biology*, 14(1):17, 2019.
- Jack Kuipers, Katharina Jahn, and Niko Beerenwinkel. Advances in understanding tumour evolution through single-cell sequencing. *Biochimica et Biophysica Acta (BBA)-Reviews on Cancer*, 1867(2):127–138, 2017.
- Emma Laks, Andrew McPherson, Hans Zahn, Daniel Lai, Adi Steif, Jazmine Brimhall, Justina Biele, Beixi Wang, Tehmina Masud, Jerome Ting, et al. Clonal decomposition and dna replication states defined by scaled single-cell genome sequencing. *Cell*, 179(5):1207–1221, 2019.
- Salem Malikic, Andrew W McPherson, Nilgun Donmez, and S Cenk Sahinalp. Clonality inference in multiple tumor samples using phylogeny. *Bioinformatics*, 31(9):1349–1356, 2015.
- Salem Malikic, Katharina Jahn, Jack Kuipers, S Cenk Sahinalp, and Niko Beerenwinkel. Integrative inference of subclonal tumour evolution from single-cell and bulk sequencing data. *Nature communications*, 10(1):2750, 2019a.
- Salem Malikic, Farid Rashidi Mehrabadi, Simone Ciccolella, Md Khaledur Rahman, Camir Ricketts, Ehsan Haghshenas, Daniel Seidman, Faraz Hach, Iman Hajirasouliha, and S Cenk Sahinalp. PhISCS: a combinatorial approach for subperfect tumor phylogeny reconstruction via integrative use of single-cell and bulk sequencing data. *Genome Research*, 29(11):1860–1877, 2019b.

- Francesco Marass, Florent Mouliere, Ke Yuan, Nitzan Rosenfeld, and Florian Markowetz. A phylogenetic latent feature model for clonal deconvolution. *Annals of Applied Statistics*, 10:2377–2404, 2016.
- Ruben Martins, Vasco Manquinho, and Inês Lynce. Open-wbo: A modular MaxSAT solver. In *International Conference on Theory and Applications of Satisfiability Testing*, pages 438–445. Springer, 2014.
- Wes McKinney. Data structures for statistical computing in python. In Stéfan van der Walt and Jarrod Millman, editors, *Proceedings of the 9th Python in Science Conference*, pages 51 – 56, 2010.
- Christopher A Miller, Brian S White, Nathan D Dees, Malachi Griffith, John S Welch, Obi L Griffith, Ravi Vij, Michael H Tomasson, Timothy A Graubert, Matthew J Walter, et al. Sciclone: inferring clonal architecture and tracking the spatial and temporal patterns of tumor evolution. *PLoS computational biology*, 10(8), 2014.
- Sabine Mueller, Payal Jain, Winnie S Liang, Lindsay Kilburn, Cassie Kline, Nalin Gupta, Eshini Panditharatna, Suresh N Magge, Bo Zhang, Yuankun Zhu, et al. A pilot precision medicine trial for children with diffuse intrinsic pontine glioma: A report from the pacific pediatric neuro-oncology consortium. *International Journal of Cancer*, 145(7):1889–1901, 2019.
- Travis E Oliphant. *A guide to NumPy*, volume 1. Trelgol Publishing USA, 2006.
- Laurent Perron and Vincent Furnon. Or-tools, 2019.
- Victoria Popic, Raheleh Salari, Iman Hajirasouliha, Dorna Kashef-Haghighi, Robert B West, and Serafim Batzoglou. Fast and scalable inference of multi-sample cancer lineages. *Genome Biology*, 16(1):91, dec 2015. ISSN 1465-6906. doi: 10.1186/s13059-015-0647-8.
- Edith M. Ross and Florian Markowetz. OncoNEM: inferring tumor evolution from single-cell sequencing data. *Genome Biology*, 17(1):69, Apr 2016. ISSN 1474-760X. doi: 10.1186/s13059-016-0929-9.
- Andrew Roth, Andrew McPherson, Emma Laks, Justina Biele, Damian Yap, Adrian Wan, Maia A. Smith, Cydney B. Nielsen, Jessica N. McAlpine, Samuel Aparicio, Alexandre Bouchard-Cote, and Sohrab P. Shah. Clonal genotype and population structure inference from single-cell tumor sequencing. *Nature Methods*, 13(7):573–576, Jul 2016. ISSN 1548-7091. Brief Communication.
- Gryte Satas and Benjamin J Raphael. Tumor phylogeny inference using tree-constrained importance sampling. *Bioinformatics*, 33(14):i152–i160, 2017.
- Jochen Singer, Jack Kuipers, Katharina Jahn, and Niko Beerenwinkel. Single-cell mutation identification via phylogenetic inference. *Nature Communications*, 9(1):5144, 2018.
- Craig A Stewart, Von Welch, Beth Plale, Geoffrey Fox, Marlon Pierce, and Thomas Sterling. Indiana university pervasive technology institute, 2017.
- Francesco Strino, Fabio Parisi, Mariann Micsinai, and Yuval Kluger. Trap: a tree approach for fingerprinting subclonal tumor composition. *Nucleic Acids Research*, 41(17):e165–e165, 2013.
- Pauli Virtanen, Ralf Gommers, Travis E. Oliphant, Matt Haberland, Tyler Reddy, David Cournapeau, Evgeni Burovski, Pearu Peterson, Warren Weckesser, Jonathan Bright, Stéfan J. van der Walt, Matthew Brett, Joshua Wilson, K. Jarrod Millman, Nikolay Mayorov, Andrew R. J. Nelson, Eric Jones, Robert Kern, Eric Larson, CJ Carey, İlhan Polat, Yu Feng, Eric W. Moore, Jake VanderPlas, Denis Laxalde, Josef Perktold, Robert Cimrman, Ian Henriksen, E. A. Quintero, Charles R Harris, Anne M. Archibald, Antônio H. Ribeiro, Fabian Pedregosa, Paul van Mulbregt, and SciPy 1.0 Contributors. SciPy 1.0–Fundamental Algorithms for Scientific Computing in Python. *arXiv e-prints*, art. arXiv:1907.10121, Jul 2019.

- Yochai Wolf, Osnat Bartok, Sushant Patkar, Gitit Bar Eli, Sapir Cohen, Kevin Litchfield, Ronen Levy, Alejandro Jiménez-Sánchez, Sophie Trabish, Joo Sang Lee, et al. Uvb-induced tumor heterogeneity diminishes immune response in melanoma. *Cell*, 179(1):219–235, 2019.
- Yufeng Wu. Accurate and efficient cell lineage tree inference from noisy single cell data: the maximum likelihood perfect phylogeny approach. *Bioinformatics*, 08 2019. ISSN 1367-4803. doi: 10.1093/bioinformatics/btz676. btz676.
- Hamim Zafar, Anthony Tzen, Nicholas Navin, Ken Chen, and Luay Nakhleh. Sifit: inferring tumor trees from single-cell sequencing data under finite-sites models. *Genome Biology*, 18(1):178, Sep 2017. ISSN 1474-760X. doi: 10.1186/s13059-017-1311-2.
- Hamim Zafar, Nicholas Navin, Luay Nakhleh, and Ken Chen. Computational approaches for inferring tumor evolution from single-cell genomic data. *Current Opinion in Systems Biology*, 7:16–25, 2018.
- Hamim Zafar, Nicholas Navin, Ken Chen, and Luay Nakhleh. Siclonfit: Bayesian inference of population structure, genotype, and phylogeny of tumor clones from single-cell genome sequencing data. *Genome research*, 29(11):1847–1859, 2019.

Supplemental Material

PhISCS-BnB: A Fast Branch and Bound Algorithm for the Perfect
Tumor Phylogeny Reconstruction Problem

Sadeqi Azer et al.

A Implementation

We have implemented the algorithm proposed in this paper with pybnb (Hackebeil, 2018) framework. This is a parallel branch-and-bound engine written in Python. It is designed to run on distributed computing architectures, using mpi4py (Dalcin et al., 2011) for fast inter-process communication.

B Benchmarking SCITE, PhISCS-I, PhISCS-B and PhISCS-BnB

B.1 First platform

Some of the experiments in this work were performed using the *Carbonate*⁹ system, a computer cluster at Indiana University. We used compute nodes from this cluster that are a Lenovo NeXtScale nx360 M5 server equipped with two 12-core Intel Xeon E5-2680 v3 CPUs and four 480 GB solid-state drives. All nodes run Red Hat Enterprise 7.x. We allowed our experiments to use up to 40GB of RAM.

B.2 Second platform

Some of the experiments in this work were performed using the *Biowulf*¹⁰ system, a computer cluster at National Institutes of Health (NIH). We used compute nodes from this cluster that have Intel E5-2650v2 CPUs.

B.3 Running SCITE other options

For SCITE, setting -fd parameter to 0 lead to the segmentation fault. Therefore we set the value of this parameter to 0.0000001. Parameter -e related to the probability of learning noise rates in a given MCMC step was set to 0.2. The full command used to run SCITE is given below:

```
scite \  
  -i $PATH_TO_INPUT_FILE \  
  -names $PATH_TO_GENE_NAME_FILE \  
  -n $n \  
  -m $m \  
  -ad $fn \  
  -fd 0.0000001 \  
  -e 0.20 \  
  -r 3 \  
  -l $iterations \  
  -o $PATH_TO_OUTPUT > $PATH_TO_OUTPUT.log
```

⁹<https://kb.iu.edu/d/aolp#overview>

¹⁰<https://hpc.nih.gov/systems/>

C Phylogenetic Analysis of Single Cell Clones Derived from a Mouse Melanoma Model

C.1 Tree with private mutations

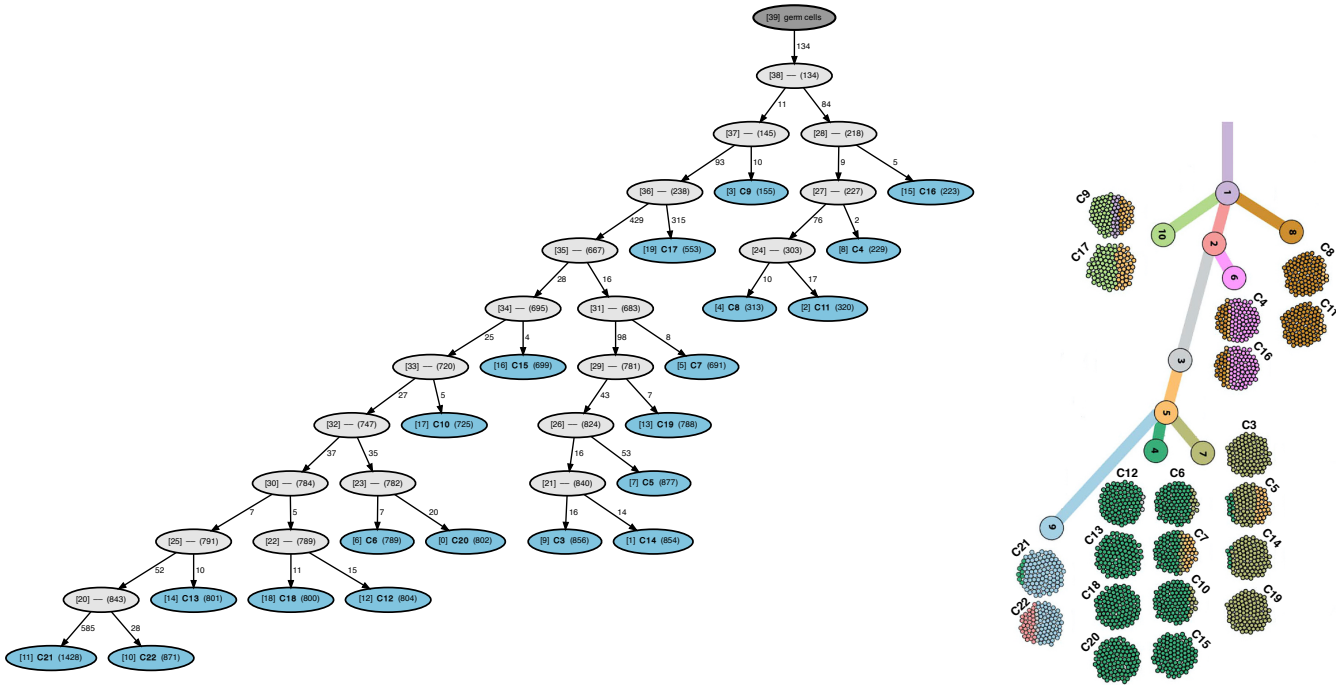


Figure 4: The tree shown on the left is the clonal tree obtained by PhISCS-BnB from whole-exome sequencing data of 20 single-cell clones, published earlier (Wolf et al., 2019). Both private and non-private mutations were used in this tree. The tree shown on the right was obtained by ClonEvol tool (Dang et al., 2017) using only non-private mutations, which were manually filtered and clustered. For each node in tree obtained by PhISCS-BnB, the number inside the square brackets denotes its node id and the number inside the parentheses shows the total number of mutations occurring on the path from the germline (root) to the node (i.e., the total number of mutations harbored by the node). Each edge is labeled by the number of mutations occurring between the associated parent and the child nodes. The nodes colored in blue correspond to single-cell clones whose labels are depicted in bold letters. The complete list of mutations occurring at each edge can be found at [here](#). The tree shown in the right and its description can be found in the Figure 6 available in the original study (Wolf et al., 2019).

C.2 Tree with error correction distributions on each chromosome

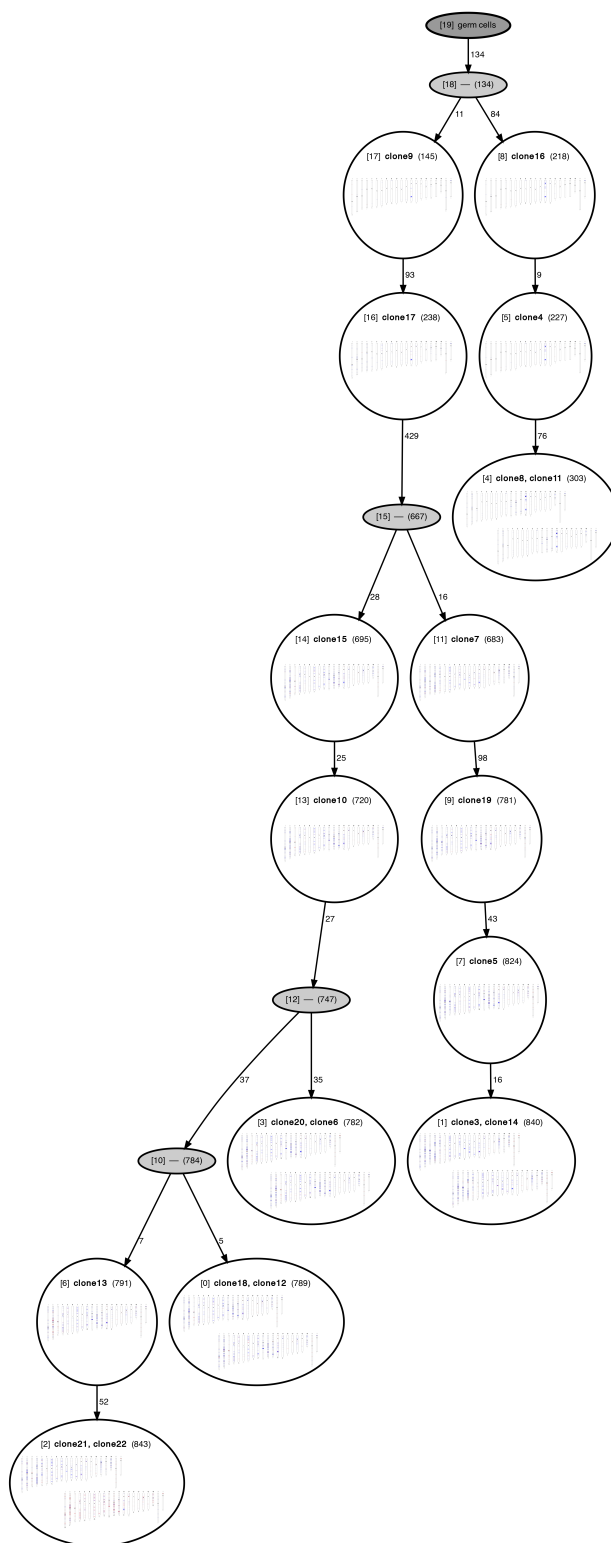


Figure 5: The clonal tree on non-private mutations obtained by PhISCS-BnB from 20 clonal sub-lineages of B2905 cell line that are derived from a mouse melanoma model. For each node, the SNV positions in each chromosome are presented as a horizontal line: a blue line indicates an SNV present in the clone and the red line indicates a false negative correction made by PhISCS-BnB). The edge labels represent the number of mutations occurring between the associated parent and child nodes. The sub-lineage labels are also included in the nodes.

D Simulated data analysis

D.1 Comparison of PhISCS-BnB against SCITE by other measure

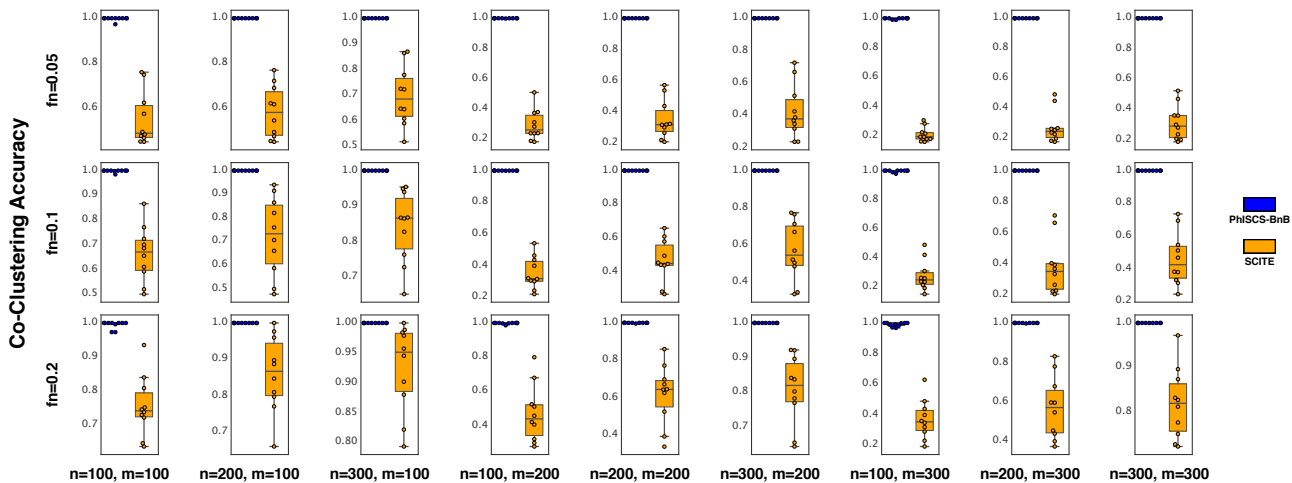


Figure 6: Comparison of PhISCS-BnB with SCITE with respect to the co-clustering accuracy measure. For each panel, 10 distinct trees of tumor evolution were generated, each with 10 subclones. In the plot, n , m and fn , respectively, denote the number of cells, the number of mutations and the false negative error rate. SCITE was allowed to run with 3 restarts, each with a running time, 10 times that of PhISCS-BnB on the same input.

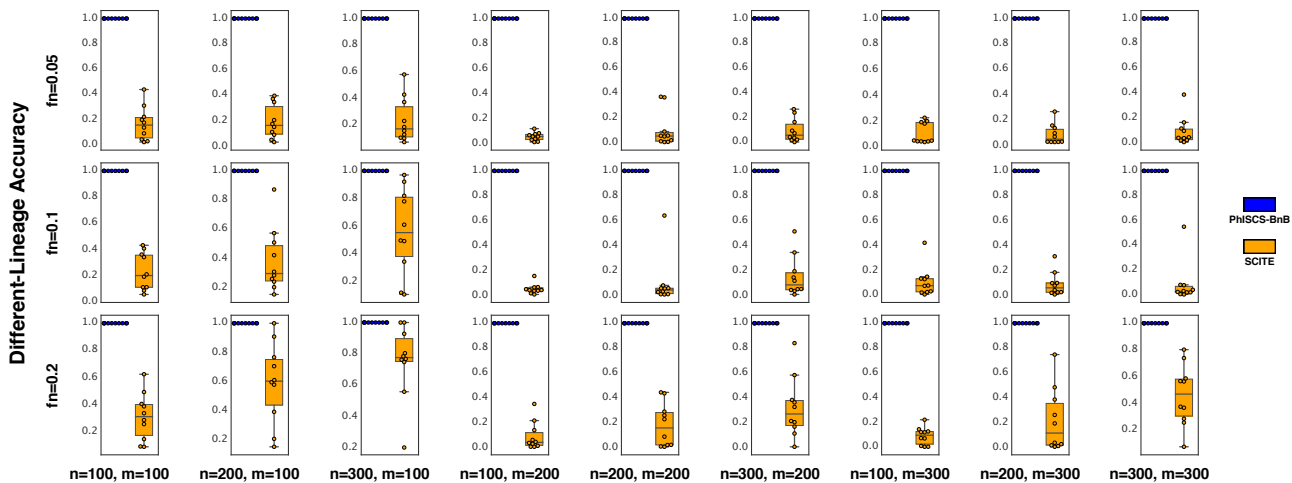


Figure 7: Comparison of PhISCS-BnB with SCITE with respect to the different-lineage accuracy measure. For each panel, 10 distinct trees of tumor evolution were generated, each with 10 subclones. In the plot, n , m and fn , respectively, denote the number of cells, the number of mutations and the false negative error rate. SCITE was allowed to run with 3 restarts, each with a running time, 10 times that of PhISCS-BnB on the same input.

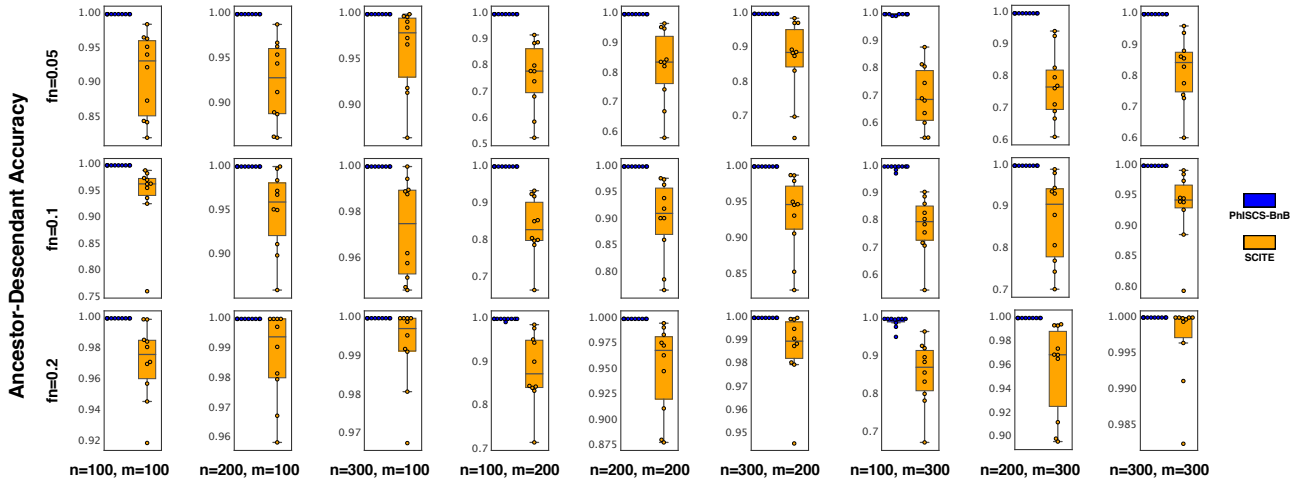


Figure 8: Comparison of PhISCS-BnB with SCITE with respect to the ancestor-descendant accuracy measure. For each panel, 10 distinct trees of tumor evolution were generated, each with 10 subclones. In the plot, n , m and fn , respectively, denote the number of cells, the number of mutations and the false negative error rate. SCITE was allowed to run with 3 restarts, each with a running time, 10 times that of PhISCS-BnB on the same input.

D.2 Comparison of PhISCS-BnB against SCITE allowing to run approximately for 1 hour

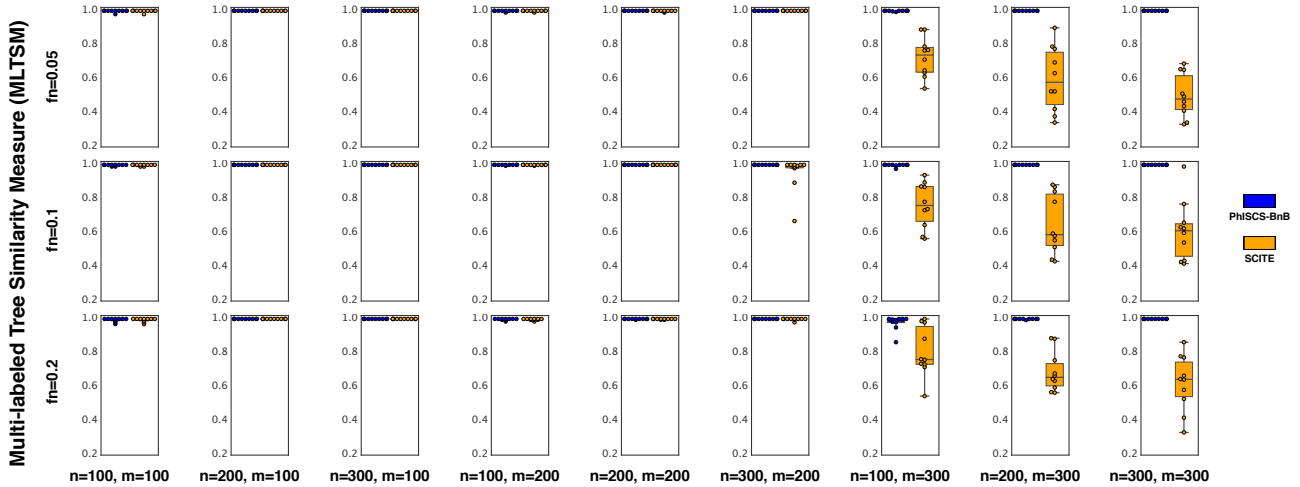


Figure 9: Comparison of PhISCS-BnB with SCITE with respect to the multi-labeled tree similarity measure (MLTSM). For each panel, 10 distinct trees of tumor evolution were generated, each with 10 subclones. In the plot, n , m and fn , respectively, denote the number of cells, the number of mutations and the false negative error rate. SCITE was allowed to run approximately for 1 hour.

D.3 Comparison of PhISCS-BnB against SCITE allowing to run with 3 restarts each with 1 million iterations

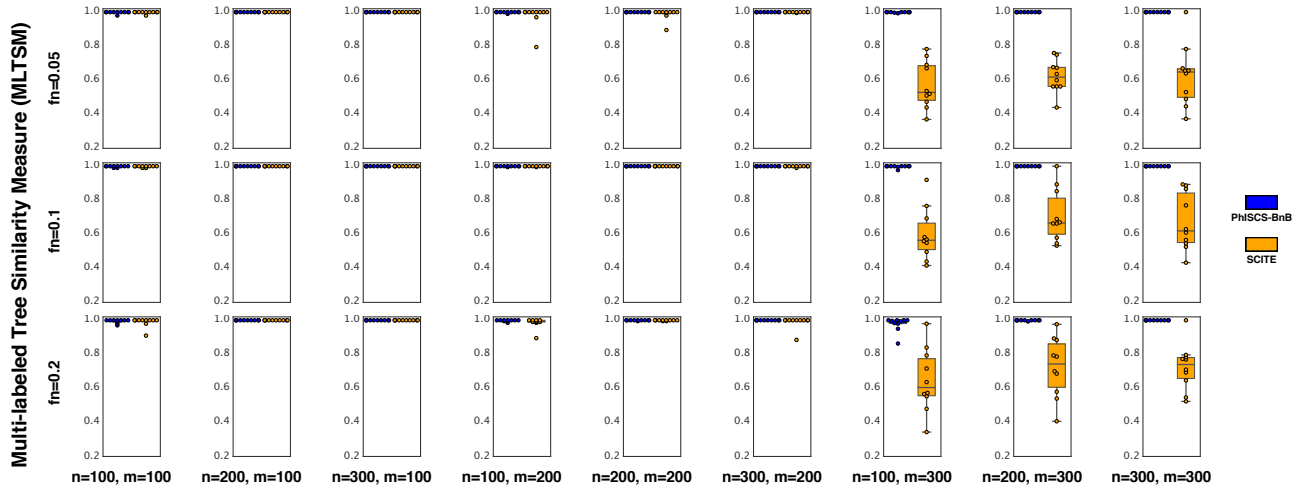


Figure 10: Comparison of PhISCS-BnB with SCITE with respect to the multi-labeled tree similarity measure (MLTSM). For each panel, 10 distinct trees of tumor evolution were generated, each with 10 subclones. In the plot, n , m and fn , respectively, denote the number of cells, the number of mutations and the false negative error rate. SCITE was allowed to run with 3 restarts each with 1 million iterations.

D.4 Comparison of PhISCS-BnB against SCITE allowing to run approximately for 24 hours

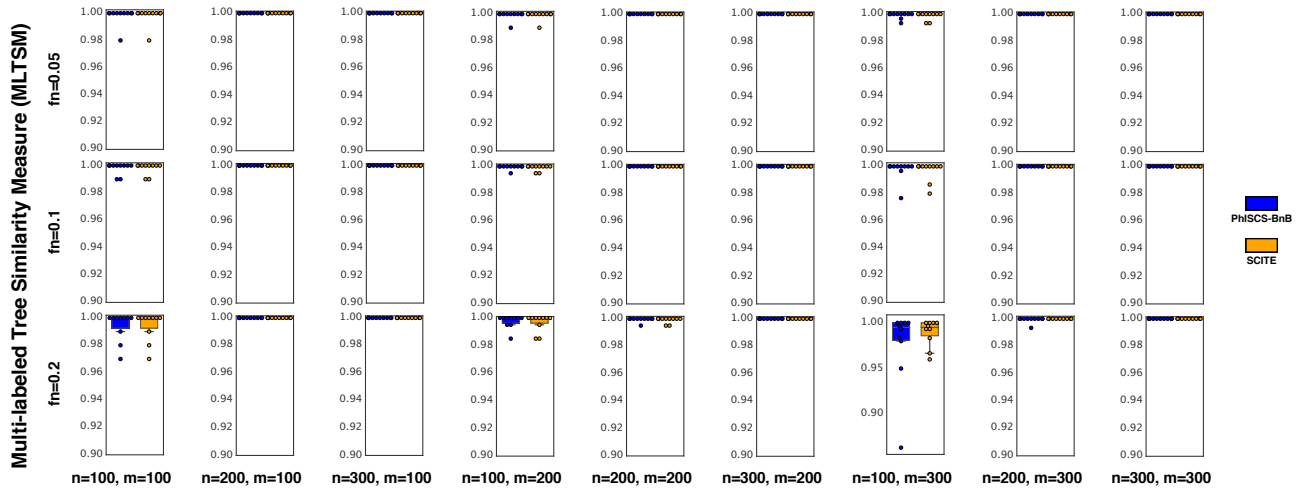


Figure 11: Comparison of PhISCS-BnB with SCITE with respect to the multi-labeled tree similarity measure (MLTSM). For each panel, 10 distinct trees of tumor evolution were generated, each with 10 subclones. In the plot, n , m and fn , respectively, denote the number of cells, the number of mutations and the false negative error rate. SCITE was allowed to run approximately for 24 hours.

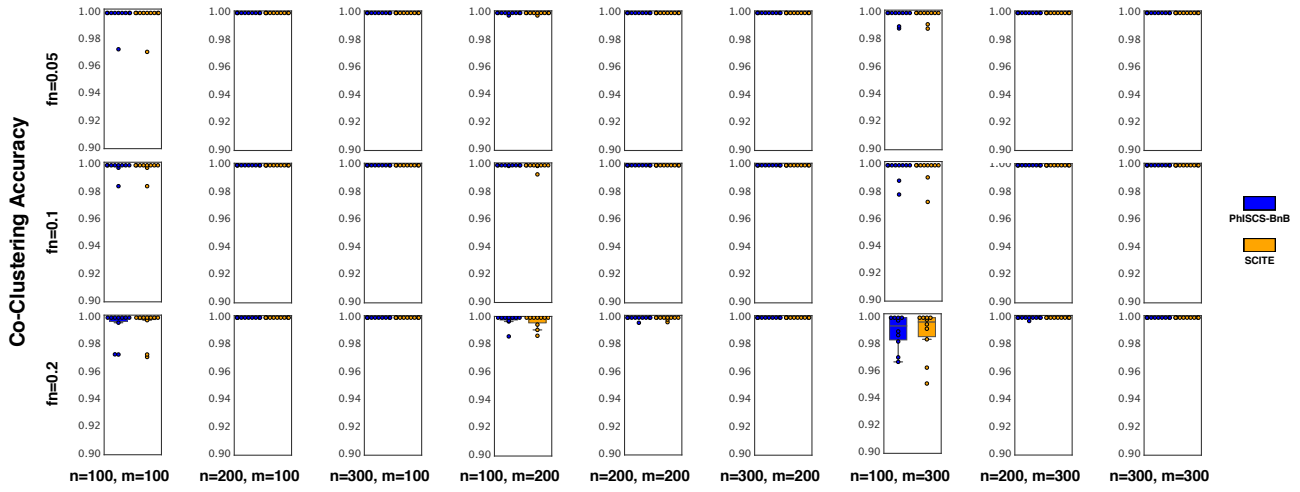


Figure 12: Comparison of PhISCS-BnB with SCITE with respect to the co-clustering accuracy measure. For each panel, 10 distinct trees of tumor evolution were generated, each with 10 subclones. In the plot, n , m and fn , respectively, denote the number of cells, the number of mutations and the false negative error rate. SCITE was allowed to run approximately for 24 hours.

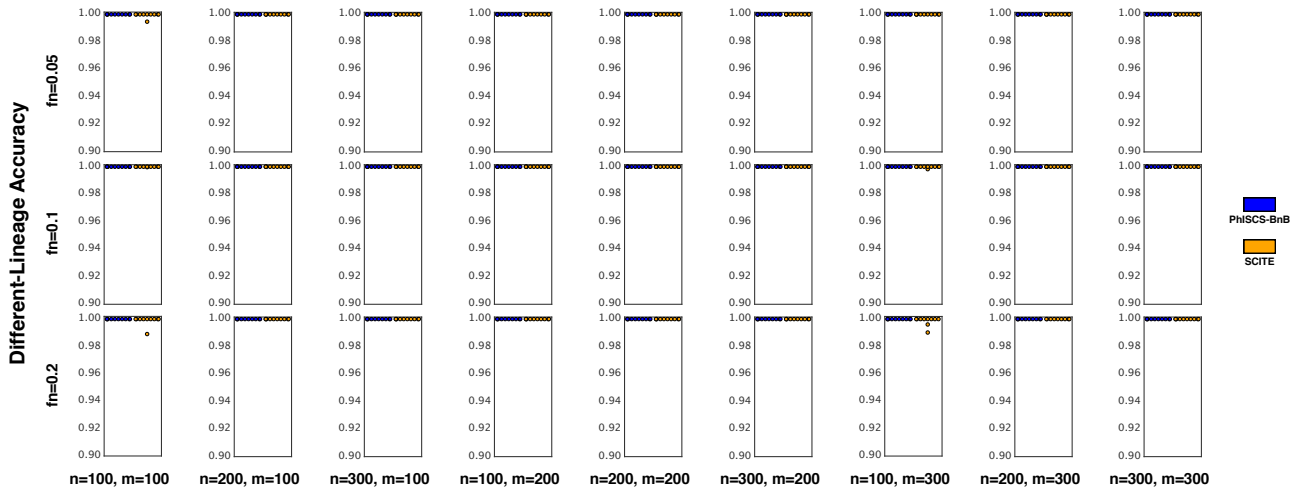


Figure 13: Comparison of PhISCS-BnB with SCITE with respect to the different-lineage accuracy measure. For each panel, 10 distinct trees of tumor evolution were generated, each with 10 subclones. In the plot, n , m and fn , respectively, denote the number of cells, the number of mutations and the false negative error rate. SCITE was allowed to run approximately for 24 hours.

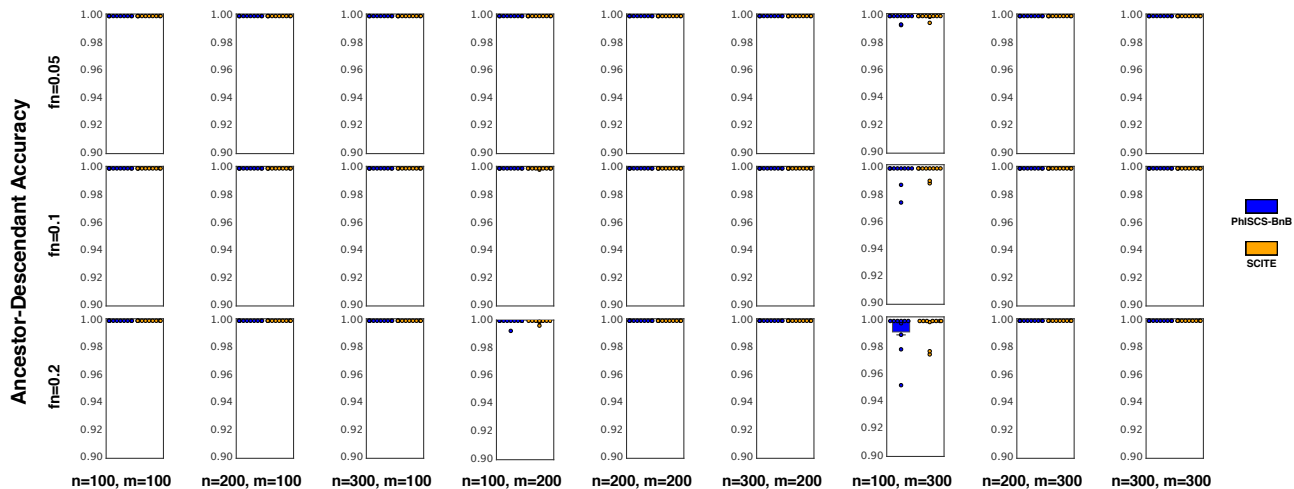


Figure 14: Comparison of PhISCS-BnB with SCITE with respect to the ancestor-descendant accuracy measure. For each panel, 10 distinct trees of tumor evolution were generated, each with 10 subclones. In the plot, n , m and fn , respectively, denote the number of cells, the number of mutations and the false negative error rate. SCITE was allowed to run approximately for 24 hours.

E Packages used in this work

- SciPy (Virtanen et al., 2019)
- NumPy (Oliphant, 2006)
- pandas (McKinney, 2010)
- Matplotlib (Hunter, 2007)
- OR-Tools (Perron and Furnon, 2019)
- tqdm (da Costa-Luis, 2019)
- NetworkX (Hagberg et al., 2008)